


Product Datasheet

Galaxy

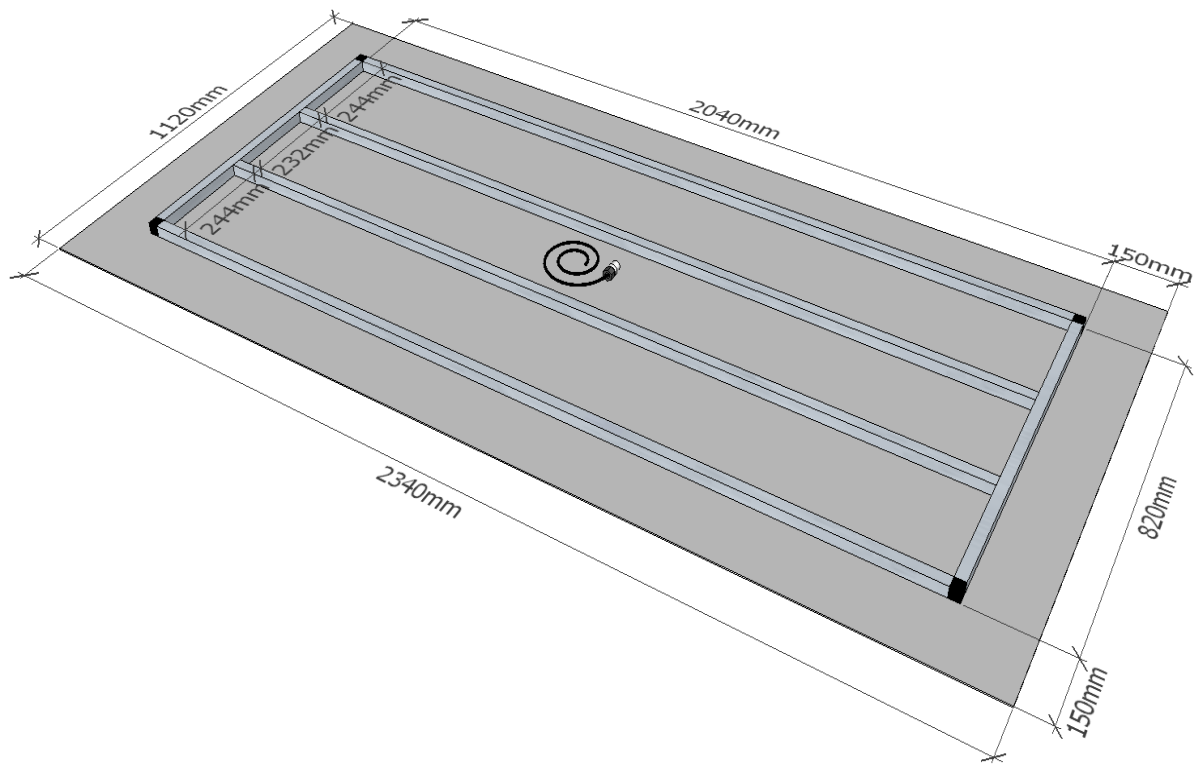

Material	Panel: 3mm aluminium composite panel Frame: 25mm box section aluminium (1.5mm thick) with plastic corners Adhesive: solvent free hybrid polymer adhesive Optical fibres: mixed diameter PMMA
Dimensions	2340mm x 1120mm x 30mm (without fixings)
Number of star points	300 (GALAXY300), 400 (GALAXY400) or 500 (GALAXY500)
Fibre diameters	1.5mm / 1.0mm / 0.75mm / 0.5mm
Fibre mix (per 100)	1x 1.5mm, 5x 1.0mm, 14x 0.75mm, 80x 0.5mm
Weight	14.5kg – 16.75kg (excluding fixings), packaged weight: approx. 44kg
Finish	Matt or gloss powder coated in black, white and various colours OR various colours of fabric finish
Location suitability	Plain ACP: dry and damp/humid. Fabric finish: dry only
Operational temperature	-3°C to +30°C
Fire performance	Class 1 (BS476 Pt7) & Class 0 (BS476 pt6&7) – Plain ACP only
Mounting system	Button Fix, Batten, Chain, Fixed bolts
Warranty	24 months
Country of manufacture	United Kingdom
Maintenance	None
Availability	Made to order
Stock code	GALAXY300, GALAXY400 or GALAXY500